

Features:

- HDMI 2.0a compliant
- Supports 4K2K@60 4:4:4 8bits
- Supports HDR* which is 4K2K@60 4:2:0 10bits**
- HDCP 2.2 and 1.4 compliant
- Wide frequency range: 25MHz~600MHz
- Video bandwidth: 18Gbps
- Supports ARC
- Supports xvYCC, x.v.Color & Deep color
- The switcher can select any HDMI input by front panel button, IR remote control, USB and Eaglesyes (Cloud) control
- Handy front panel button to switch any four HDMI/DVI sources
- Front Panel LED indicators
- Equalization on input ports and pre-emphasis on output port
- Easy installation
- Supports Cloud control***



* HDR = High Dynamic Range.


** The video bandwidth of 4K2K@60 4:2:0 10bits (HDR) is 384MHz, and the 4K2K@60 4:4:4 8bits is 594MHz

*** Cloud support is thru an encrypted communication to provide the best private protection when using LTK-5004RZ


Package Contents:

- 1x LTK-5004RZ
- 1x 5V DC power adapter
- 1x Installation Software CD
- 1x User Manual
- 1x IR Remote Control (15 keys)

➡ HDMI
➡ AUDIO
➡ CAT5/5e/6

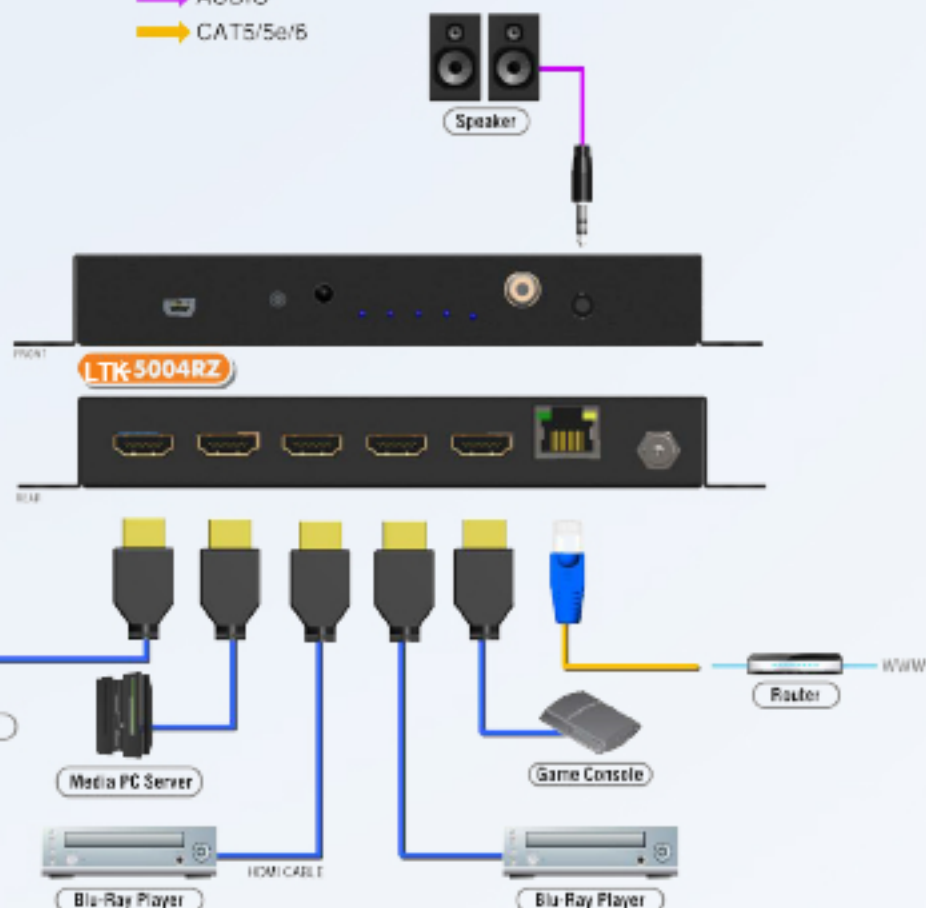

Front Panel

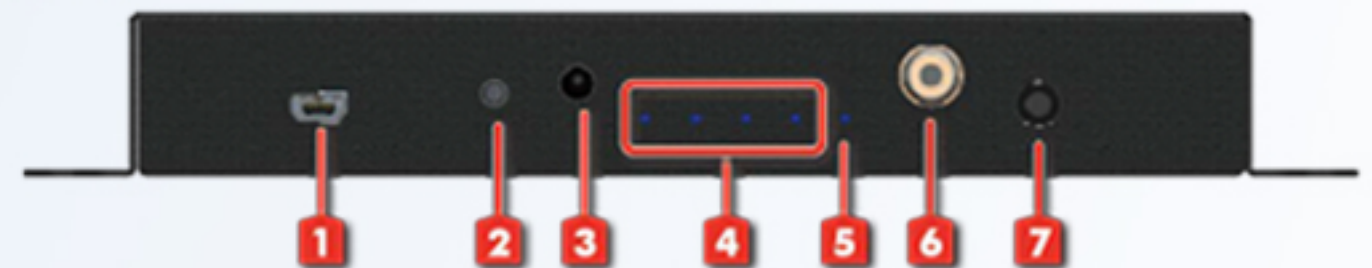

- 1. Mini USB:** for software control or firmware update
- 2. Channel Push Button:** Select input channel
- 3. IR Sensor:** IR sensor for receiving the IR commands from IR remote
- 4. Selected Source Status LED:** When users use port channel push button, the indicator LED will show the selected source. (from the left to the right is input 4, input 3, input 2, input 1)
- 5. Power Status:** Power indicator LED
- 6. S/PDIF Out [ARC]:** Connect to an S/PDIF digital audio output
- 7. Stereo Out [ARC]:** Connect to an stereo analog audio output

Rear Panel



- 8. HDMI OUT:** HDMI output
- 9. HDMI Input 1~4:** HDMI inputs (from the left to the right is input 1, input 2, input 3, input 4)
- 10. Ethernet:** Ethernet control port
- 11. +5V DC:** Connect to a 5V DC power supply