

# 150M HDMI EXTENDER WITH TCP/IP

## User Manual



### 1. Product Description

This HDMI Extender includes a transmitter unit (TX) and a receiver unit (RX), working as a pair. It allows for transmission and extension of full HD 1080p@60Hz HDMI signal via CAT5e/6 UTP network cable, with a transmission distance of up to 150 meters. It supports point-to-multi-point over an Ethernet switch over IP. At the same time, the signal is stable, and the built-in EDID greatly improves the compatibility of the device. This product is perfect for AV transmission in applications such as HD conference systems, HD video shooting, HD multimedia education systems, HD digital advertising, and signage, etc.

The device has a long transmission distance, low use cost, convenient installation, and good compatibility, and it is a stable and efficient transmission method.


## 2. Main Features

- Compact size and Slim design, strong anti-interference ; easy installation.
- Distance up to 150m over UTP CAT5E/6 cable.
- Video resolution max up to 1920\*1080@60Hz.
- Support 1 to many receivers transmit ( 253pcs RX over Ethernet switch ) .
- Support IR(38khz) signal pass back control .
- Support HDMI 1.3 and HDCP 1.2 standard.
- High compatibility, can auto-match source and display device.
- Built-in automatic adjustment system, make the image smooth, clear and stable.
- Built-in ESD protection system; Simple to install, plug and play.
- TCP/IP Ethernet communication.
- Real-Time Video/Audio Transmission over IP.
- Pure Ethernet , Simple Cabling .
- Application Fields : 1 : N Solution (Shop, restaurant, kiosk, classrooms,Monitor, Speaker, Energy Saving , virtual desktop , Digital Camera ,TCP/IP Network ).
- Ordinary 100M or 1000M Ethernet switch.

## 3. Advantage




Full HD 1080P@60Hz




Point to Multi-point




150m long distance



Built-in ESD protection



Strong compatibility & automatic recognition



HDCP 1.2; HDMI1.3



IR passback



Plug and play

## 4. Specification


	Parameter	Description
Video	Standards	HDMI 1.3; HDCP 1.2
	Maximum pixel clock	165MHz
	Maximum data rate	6.75Gbps
	Resolution	Max: 1920X1080@60Hz
	Connector	HDMI-A
	Impedance	100Ω
IR	Interface	3.5mm earphone seat
	Signal direction	Unidirectional
	Signal type	Digital
	IR frequency	38kHz(Other Choice20-60kHz)
Ethernet	Interface	RJ45 (568B)
	Transmission distance	UTP CAT5e---150m
Other	Power supply	The power adapter: DC 5V
	Power dissipation	MAX 4W
	Temperature	Operating: -5℃ ~ +70℃
	Humidity	Operating: 5% ~ 90%
	Dimension	79*43*23mm
	The warranty	1 year free warranty

## 5. Panel

### Sender:



### Receiver :

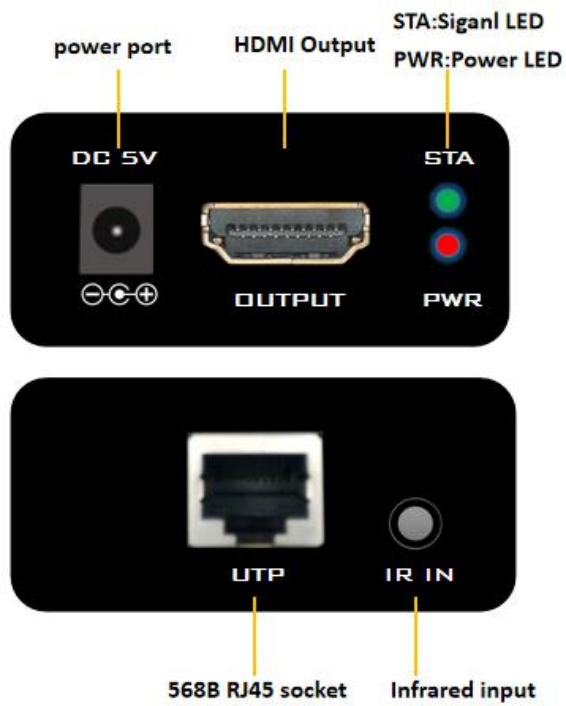

## 6. Installation Steps


- 1、 Connect the provided DC/5V power supplies to the power socket of the transmitter and the receiver,
- 2、 Connect an HDMI cable between the HDMI input port of transmitter and the HDMI output port of the video source,
- 3、 Connect the HDMI output port of receiver to the display device with HDMI cable,
- 4、 Connect the transmitter RJ45 port to the receiver RJ45 port using a single CAT5e/6 cable.
- 5、 IR function---connect the IR TX (the bigger) cable to the HDMI receiver, connect IR RX cable to the HDMI transmitter and the IR TX must face to the controlled device.

## 7. Packing List

- HDMI extender transmitter x 1
- HDMI extender receiver x 1
- IR sender and receiver cable x 1
- Power adapter x 2
- Instruction manual x 1

## 8. Using Diagram & Application

### One to one

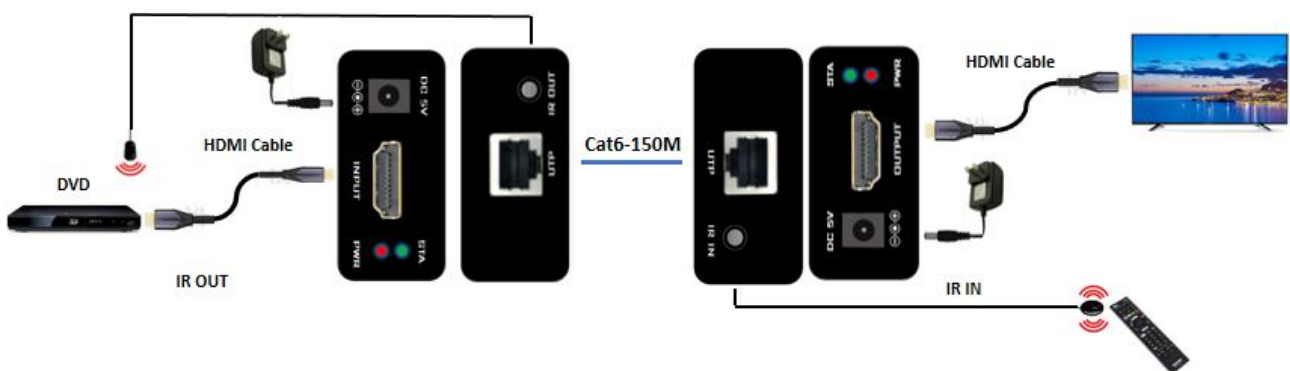

# One to many

