

# VGA-SPA2 Instruction Manual

## Admeasure :

Good quality for electrocircuit Design .One line input ,many line output .Show it clear-cut .

## Design :


Keep it show clear-cut , the signal output alone by each port , noninterference each other . High-power drive load .Keep it the signal output good quality .

## Adhibition :

1. Public Video System (Stockjobber .Time-bargain Market .Finance Securities Business act.)
2. Easy Computer Teach .
3. High-Quality Multimedia display .
4. High-clear LCD Screen .Plasm TV display concil house .
5. Calculator display concil house.
6. Video Meeting .

## Technique Parameter :

1. Signal :VGA .SVGA.XGA.QXGA, UXGA and Multisync displays/ AUDIO (R L)
2. Input port:1 Port x High Density DB15 (Female) /AUDIO x 1 Port
3. Output port :2 port x High Density DB15 (Female) /AUDIO x 2 Port
4. Video input :1Vp-p
5. Video impedance :75  $\Omega$
6. Video gain : 0db  $\cong$  DG  $\cong$  1db
7. Maximum Video Resolutions :1920 $\times$ 1440@85HZ
8. VGA Bandwidth:350M/-3db
9. Audio input: 2.2Vp-p/20K  $\Omega$
10. Audio gain: -3db  $\cong$  DG  $\cong$  0db
11. AC area:185V-250V 50Hz
12. Rated power :4W
13. Operating Environment Temperature:-10 $^{\circ}$ C-40 $^{\circ}$ C
14. External Dimensions : 145 $\times$ 83 $\times$ 45mm

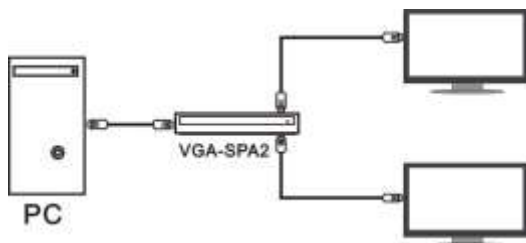

## Warnings :

1. To avoid Electrical Shock, do not open the cabinet .Refer servicing to qualified personal only .
2. Put this machine on Ventilation Place.
3. Do not expose the machine to high temperatures ,high humidity ,or direct sunlight .
4. Before cleanness power off . Don't use chemical wipe .